
Tower clock movements


To display time, the dial is associated with a clock movement.

The clock movement is controlled by a master clock or is directly synchronised by a GPS or a radio antenna.

Automatic time setting with absolute accuracy.

The hand position is electrically controlled in order to guarantee the exact time display.

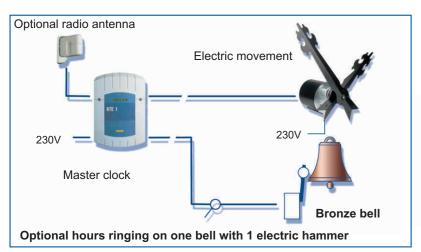


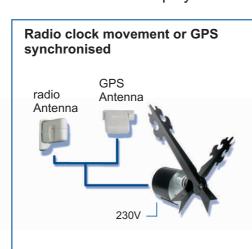

Fits with indoor or outdoor dials with non protected hands. An electric movement is installed for each dial, the shaft length is adapted to the wall thickness.

3 models: - Clock movement 2M for dial diameter 0,5 m to 2 meters

- Clock movement 4M for dial diameter 2 m to 4 meters









electric drive



radio synchronised, GPS or coded time

5 versions:

- DI D2 230 V electric impulses
- IRIG-B/AFNOR coded time signal
- France Inter or DCF radio
- GPS satellite signal
- Mechanical drive



Technical features:

Rust proof material construction, zinc coated steel casing, stainless steel shafts in self lubricated bronze bearings.

Mechanism protected by a dust proof and weatherproof casing.

Operating temperature from -20°C to +50°C (-20°F to +122°F), -40 to +60°C for D1D2 movement (-40°F to +140°F). Wind speed resistance up to 130 Km/h (80 Mph)

Some designs



Cathedrals: Sacré coeur - Paris, Chartres, Nice, Bourges in France, Thuam Cathedral - Ireland, Yamoussoukro Basilica - Ivory Coast, Fukuoka - Japon, Salamanca - Spain.

Churches: 25 000 worldwide installations.

Community centres and clubs: Fox Studios - Australia, Gracanica Tower - Bosnia, Pagritio Stadium - Greece,

Tower - Malaysia, Lima Hospitals - Peru, Millenium Clock - Poland, Arroyo Molinos - Spain. Department stores and universities: Sydney - Australia, Galway University - Ireland, Yarmouk Shopping Centre -Koweit City, University Stadium - Portugal, Koc University - Turkey, Westminster University - Uzbekhstan. Transport facilities: worldwide.

Varied: Pori Bus terminal Finland - Transmilenio Colombia.



Prost prostor d.o.o. Sp. Vižinga 21b 2360 Radlje ob Dravi

tel.: 00386 2 88 80 474 fax: 00386 2 88 73 597 email: info@prostprostor.si

Tower clocks




Since 1868





Standard dials and hands

For any tower clock installation (public building, churches, schools...), the dial and hands are the most visible parts. Thus, they must be choosen in accordance with building architecture.

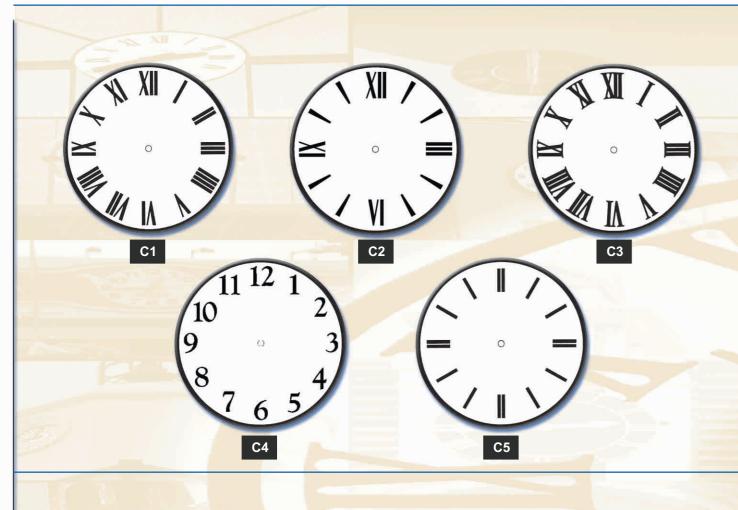

Dial models

Dial diameter from 0,6 to 2 metres
Translucent acrylic construction insensitive
to ultra violet rays and weatherproof
(outdoor installation without protection).
Non corrosive zinc plated steel frame,
oven baked paint finish.

UV resistant and weatherproof numerals and graphics (Numerals can be mounted in relief if required.)

5 models of dials with marking: C1, C2, C3, C4, C5 (Other models and non standard designs upon request.)

Standard models
White dial and black graphics.

M0 M1 M2 M3 M4 M5

Optional graphics

M0 No graphic

M1 Minute marks

M2 Central ring

M3 Minute mark + Central ring (M1+M2)

M4 13 sectors

M5 Minute marks + 13 sectors (M1+M2)



Hand styles

Balanced hands :Aluminium frame with hand bushes. Designed for indoor or outdoor use, without hand protection.

4 styles:

- Straight hands
- Stylised hands
- Gothic hands
- Roman hands

Standard colour : black
Any other colour and design upon request

translucent

translucent

Coloured dials and hands

Design your own dial and hands with selection of colours, dial marking and graphics :

Coloured dials with marking C1 to C5 Skeleton dials with marking C1, C2, C3 or C5. Enamelled dials with marking C1 to C5
Other designs: square dials, ovals...upon request



